


LUDOVICO CHANDELIER

INSTALLATION INSTRUCTIONS

1 OF 6

BARONCELLI ⌘

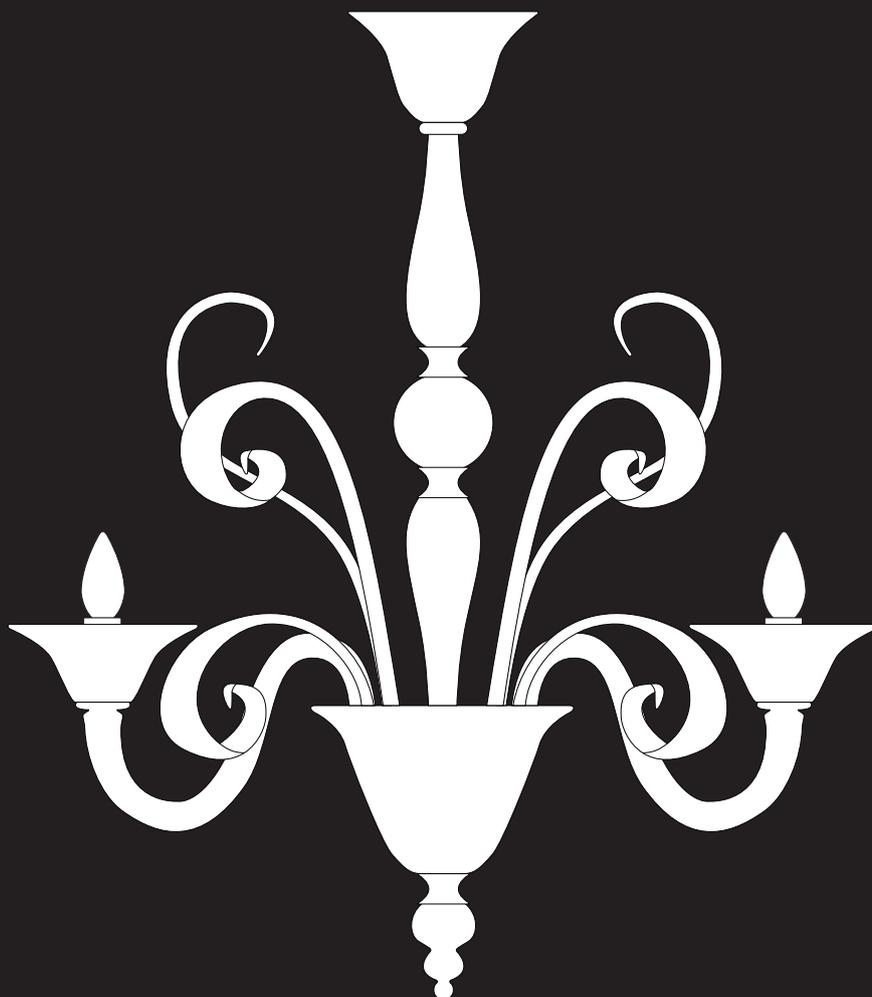

WHAT IS INCLUDED

1. Ceiling canopy
2. Chain
3. Spares

WHAT YOU WILL NEED

1. Hook / Junction box fixings
2. Bulbs - E14 (240v) / E12 (120v) - Max 60W
3. Screwdriver (3.5mm / 1/8" flat tip) + pliers
4. Soft cloth

WEIGHTS


- 6 Lights 18kg (40LB)
- 8 Lights 22kg (49LB)
- 10 Lights 25kg (56LB)

LUDOVICO CHANDELIER

INSTALLATION INSTRUCTIONS

2 OF 6


BARONCELLI ⌘

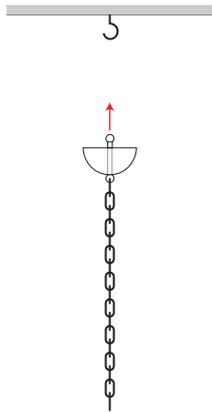

STEP 1


Using a heavy-duty hook secured firmly into a joist, hook the ceiling canopy and chain. Ensure hook is capable of taking a 18kg load.

NOTE: CEILING HOOK IS NOT SUPPLIED

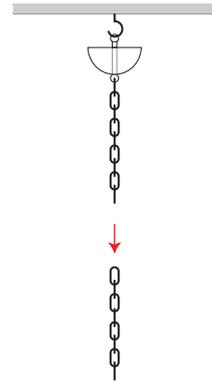


STEP 2

Remove excess chain to determine full drop.

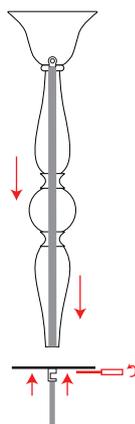

STEP 3

Assemble central stem elements and secure beneath plate.

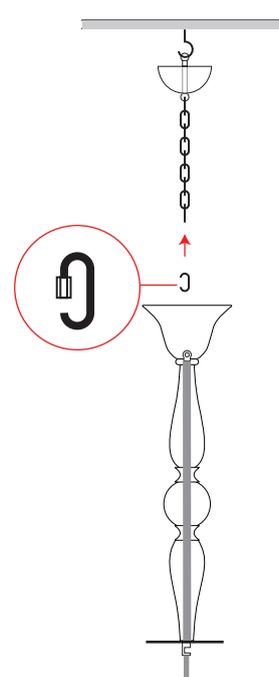

STEP 3


Use shackle to hook the stem to the chain.

LUDOVICO CHANDELIER

INSTALLATION INSTRUCTIONS


3 OF 6

BARONCELLI 

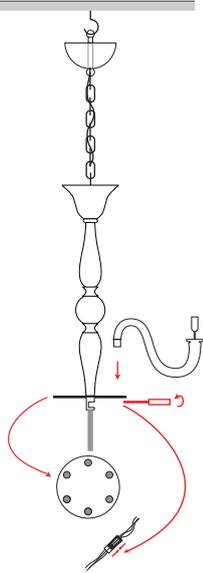


STEP 4

Install the arms into their corresponding sockets within the fondino plate. Secure into the socket below the plate and make electricals using 'click' connectors.

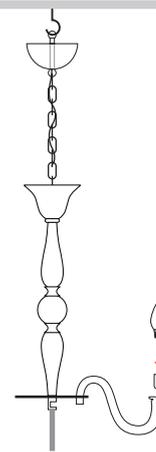


STEP 5

Install bulbs before testing electrics.

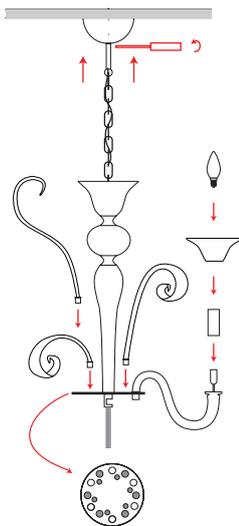

STEP 6

Raise ceiling canopy and secure in position. Install cup, candle sleeve and bulb onto each arm. Insert detail elements.

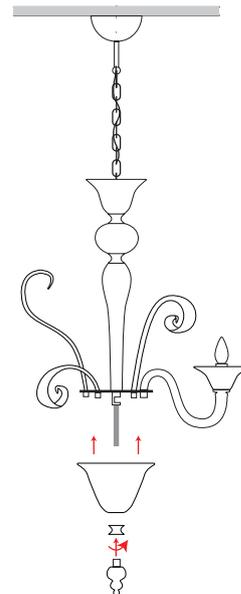

STEP 7


Raise fondino and metal liner into position and secure using finial beneath.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN


4 OF 6

BARONCELLI

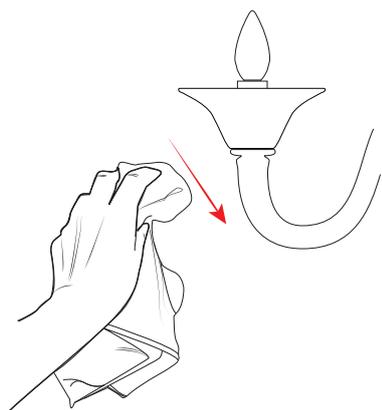


GLASS CLEANING

Glass elements should be carefully cleaned using a soft cloth.

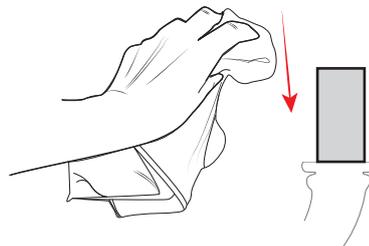

METAL CLEANING

Carefully clean metal surfaces using a soft cloth and no liquid.

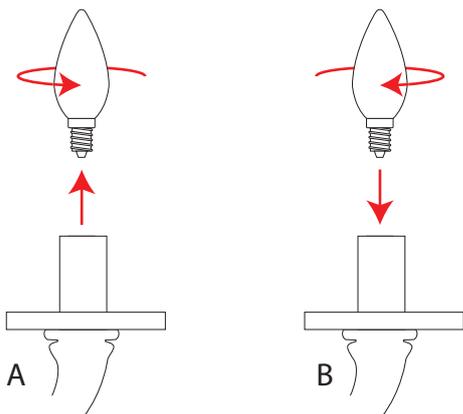

REPLACING A BULB



Ensure electricals are switched off and bulb has cooled down. Remove bulb and replace.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

5 OF 6

BARONCELLI

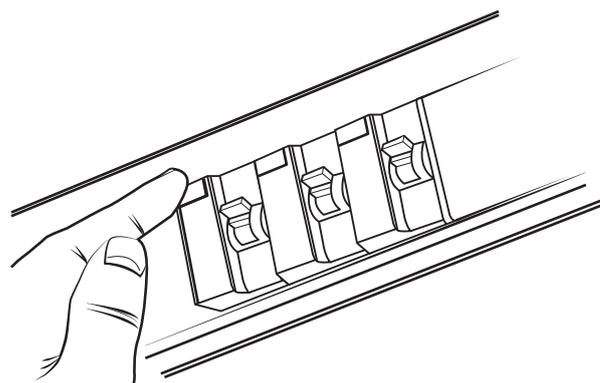
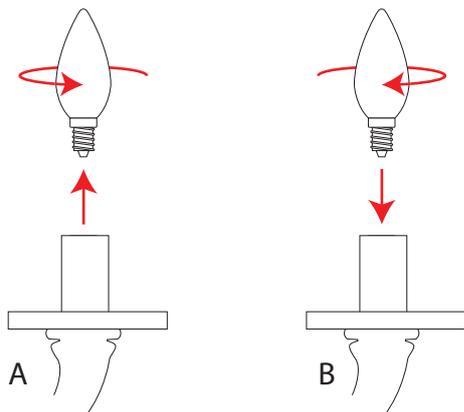


STEP A TROUBLE SHOOTING - ELECTRICAL FAULTS

If only a single bulb is not working, check, remove and replace the bulb.

STEP B TROUBLE SHOOTING - ELECTRICAL FAULTS

Check fuseboard

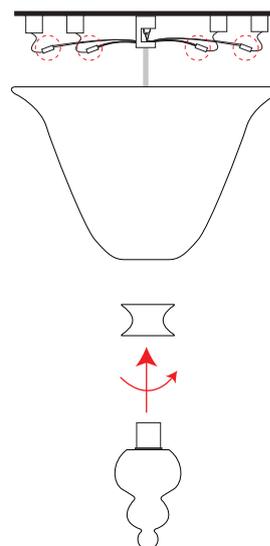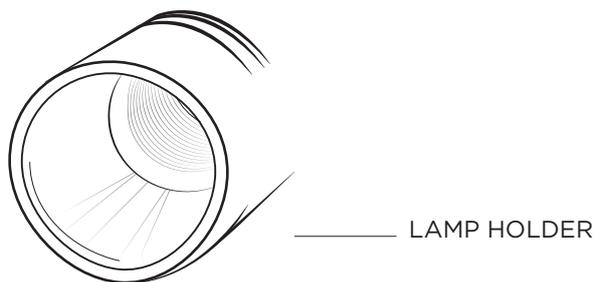

STEP C TROUBLE SHOOTING - ELECTRICAL FAULTS

Check/test lamp holder. Retrace installation steps to access.

STEP D TROUBLE SHOOTING - ELECTRICAL FAULTS


Remove finial and fondino to check/test connections at arm bases.

OPERATION AND MAINTENANCE

ENSURE ANY ELECTRICAL WORK IS CARRIED OUT BY A QUALIFIED ELECTRICIAN

6 OF 6

BARONCELLI

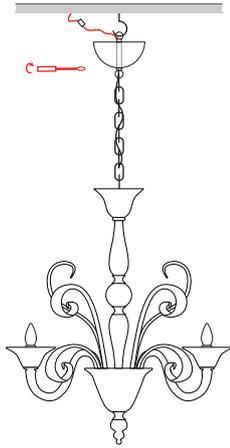

STEP E TROUBLE SHOOTING - ELECTRICAL FAULTS

Lower ceiling canopy. Check/test connections at arm arm bases.
